



# Mobile Isolating Transformer

Safe Power Supply for

Construction, Industry, and Safety-Critical Applications

**Built for tough environments — customized for your site.**

## Technical Specifications:

- Three-phase isolating transformers according to EN 61558-2-4
- Power range: **3 – 100 kVA**
- Voltage: 3×400 V (3x 230 V) or customer-specific
- IP rating: IP43–IP54
- Frequency: 50–60 Hz
- Inrush current:  $< 9 \times I @ 5 \text{ ms}$  or customized
- Protection class: II

## Enclosure Options:

- Powder-coated galvanized steel or stainless steel
- on wheels, with forklift pockets or special mounting design

## Connections:

- Input: CEE-inlet, cable
- Output: CEE-sockets, Schuko sockets, cable

## Protection & Safety:





- Circuit protection: load disconnect switch  
fused socket outlets
- RCD (residual current device): on request
- Thermal limiter: on request

**CE** - compliance

## Manufactured in accordance with:

- EN 61558-2-4
- EN 60364-4-41

**Manufacturer:** ELMA TT  
**Warranty:** 2 Years

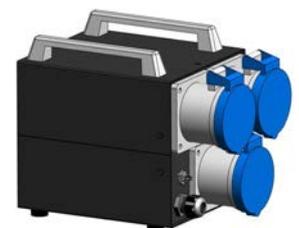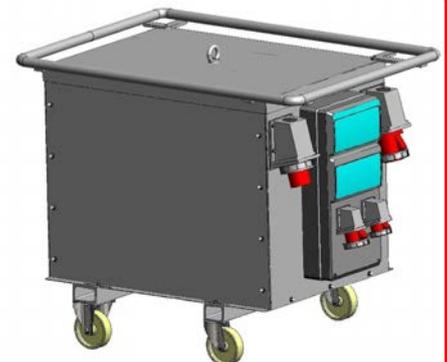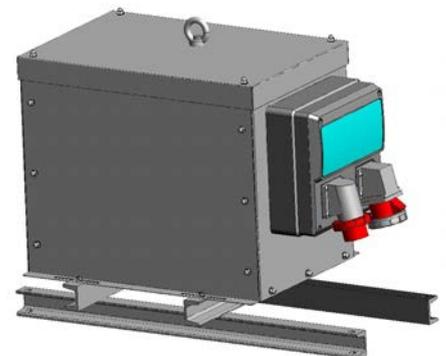

**ELMA TT Tovarna transformatorjev d.o.o.**

T: +386 1 58 90 500 | sales@elmatt.si  
Identity Nr.: 5488788 | VAT Nr.: 78733731